


# C1US



## Key Features

- Picture-in-Picture display
- Audio and Video synchronization controls
- Modular input option
- Seamless switching between any in and any out
- Multiple transition effects available
- Support TAKE pre-sync for delay
- User-defined output resolution
- Customized EDID management
- Multiple test patterns built-in
- Multiple cascaded splicing display
- 1U standard rack mount


## Application

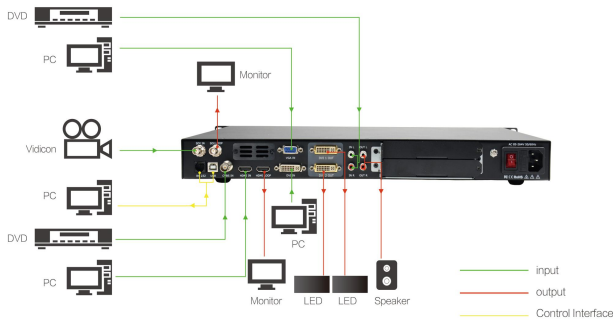

## Order Codes

Product Code	Item
110-3000-01-0	C1US (with SDI & DVI)
190-0001-02-1	VGA Input Module 1xVGA
190-0001-03-1	DP Input Module 1xDisplayPort
190-0001-04-1	DVI Input Module 1xDVI
190-0001-06-1	HDMI In/Loop Module
190-0001-07-1	3G-SDI In/Loop Module

## Dimensions

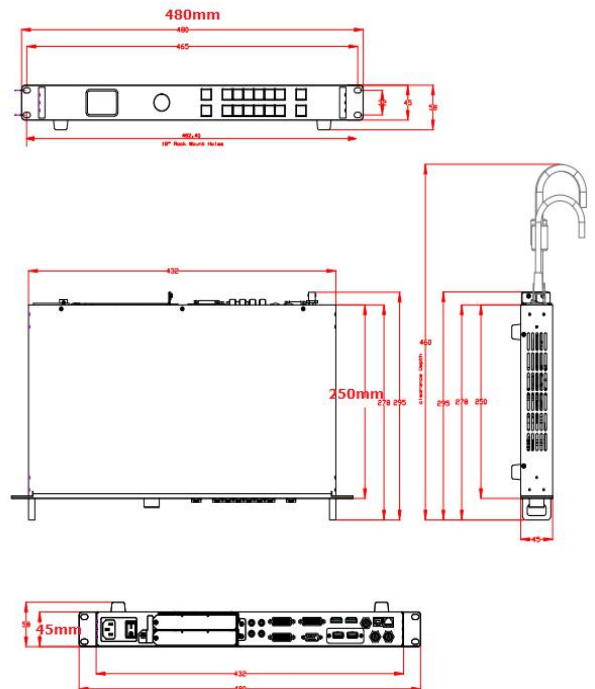

Product Code	Item
190-0001-09-1	CVBS Input Module 1xCVBS
190-0001-10-1	USB Input/Backup Module

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com  
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

**RGBlink®**

www.rgbink.com



Specifications are correct at time of printing and subject to change or alteration without notice.

## Specification

<b>Connectors</b>	Input	<i>Standard with</i>	HDMI In/Loop	2xHDMI-A
			DVI	1xDVI-I
			VGA	1xDB15
			SDI In/Loop	2xBNC
			CVBS	1xBNC
			Audio L/R	2xRCA
		<i>1 optional input select from</i>	DVI Module	1xDVI-I
			VGA Module	1xDB15
			HDMI Module	2xHDMI-A (1 In/1 Loop)
			CVBS Module	1xBNC
			3G SDI Module	2xBNC (1 In/1 Loop)
			USB Module	2xUSB-A (1 In/1 Backup)
			DP Module	1xDisplayPort
	Output	<i>Standard with</i>	DVI	2xDVI-I
			Audio L/R	2xRCA
	Communication		1xRJ11	Serial RS232 In
			1xUSB-B	Serial USB In
	Power		1xIEC	
<b>Performance</b>	Input Resolutions	DVI   HDMI   DisplayPort	SMPTE 480i   576i   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60	
		VESA	800x600@60   1024x768@60   1280x768@60   1280x1024@60   1366x768@60   1600x1200@60   1920x1080@60	
		VGA	VESA 800x600@60   1024x768@60   1280x1024@60   1366x768@60   1440x900@60   1600x1200@60	
		CVBS	SMPTE 480i   576i	
		SDI	SMPTE 480i   576i   720p@25/30/50/60Hz   1080i@50/59.94/60Hz   1080p@23.98/24/25/29.97/30/50/59.94/60Hz	
	Output Resolutions	<i>Select from below or configure customized</i>	SMPTE 720p@50/60   1080p@50/60	
		VESA	1024x768@60   1280x720@60   1280x800@60   1280x1024@60   1360x768@60   1366x768@60   1440x900@60   1400x1050@60   1600x1200@60   1680x1050@60   1920x1080@60   1920x1200@60   2048x1152@60   2560x816@60	
	Supported Standard	SDI	SMPTE 425M (Level A & B)   SMPTE 424M   SMPTE 292M   SMPTE 259M-C   DVB-ASI	
		VGA	UXGA	
		HDMI	1.3	
		USB	2.0	
		DisplayPort	1.1	
	Grey Level		10 Bit	
<b>Power</b>	Input Voltage		AC 100V-240V, 50/60Hz	
	Max Power		65W	
<b>Enviroment</b>	Temperature		0°C~55°C	
	Hudmidity		20%~90%	
<b>Physical</b>	Weight	Nett	3.1kg	
		Packaged	5.25kg	
	Dimension	Nett	480mmx295mmx58mm	
		Packaged	540mmx360mmx135mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbblink.com

Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

**RGBlink**<sup>®</sup>

www.rgbblink.com



Specifications are correct at time of printing and subject tochange or alteration without notice.