



SubitoNX E16

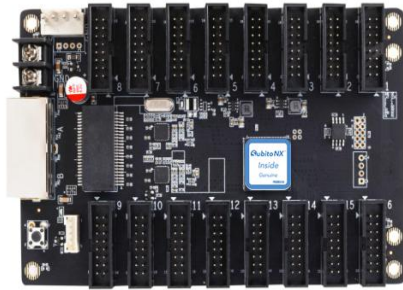

Front View

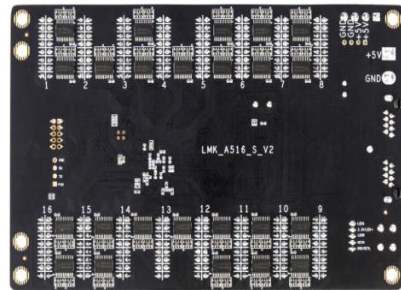

Rear View


Key Features

- 32 sets of RGB parallel data output, up to 128×1024 pixels
- Each LAN port support width up to 3840, height up to 2900
- Support receiver parameters and firmware readback
- Prestore two sets of receiver parameters
- Support image of different screens connection fastly
- Data calibration, dual backup and restore
- Support receiver configuration file backup
- Dual ethernet hot backup
- Ethernet error code detection
- 3D function


Specification

Performance	Load Capacity	128×1024
Power	Input Voltage	DC 3.6~5.0V/0.5A
	Max Power	2.5W
Environment	Temperature	-25℃~100℃
	Humidity	0%~65%
Physical	Weight	0.1kg
	Dimension	146.8mm×91.2mm×19.1mm

Dimension

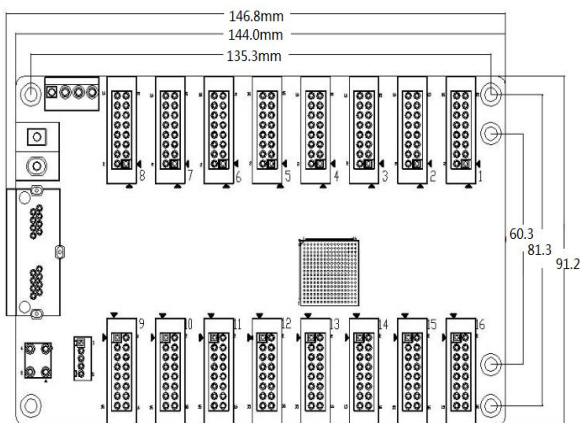

Pin Definition Diagram

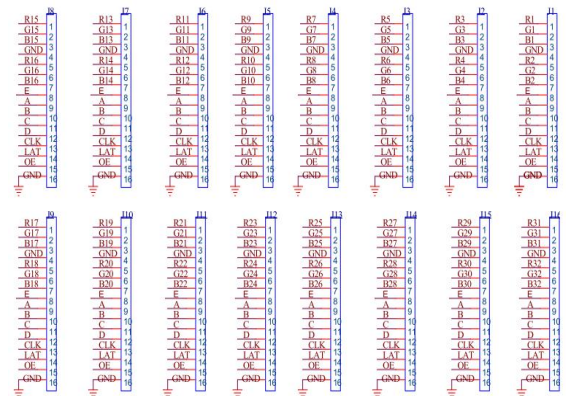

Order Codes

Product Code	Item
850-0016-01-0	SubitoNX E16

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

