


Front View

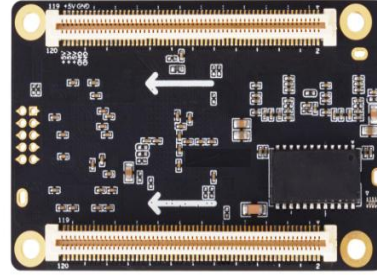

Rear View


**Key Features**

- 32 sets of RGB parallel data output, up to 512x512 pixels
- Each LAN port support width up to 3840, height up to 2900
- Support receiver configuration parameter dual backup and readback
- Data calibration, dual backup and restore
- Pre-store multi-receivers parameters
- Support image of different screens connection fastly
- Brightness and chroma calibration point by point
- Dual ethernet hot backup
- Ethernet error code detection
- Monitor in-voltage and temperature
- FLASH(supported by intellectual module)
- Support LCD module to show monitor information


**Specification**

<b>Performance</b>	Load Capacity	512x512
	Data Set	Parallel 32 sets Serial 64 sets, up to 96 sets
	Supported Standard	HDR HDR10, HDR10+, HLG
<b>Power</b>	Input Voltage	DC 3.6~5.5V/0.6A
	Max Power	3.0W
<b>Environment</b>	Temperature	-20°C~70°C
	Humidity	0%~65%
<b>Physical</b>	Weight	0.017kg
	Dimension	70mmx45mmx7.5mm

**Dimension**

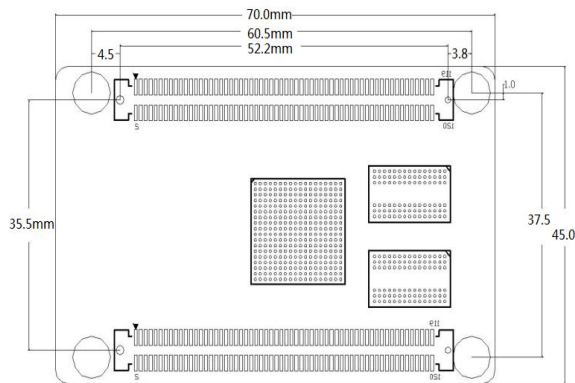

**Pin Definition Diagram**

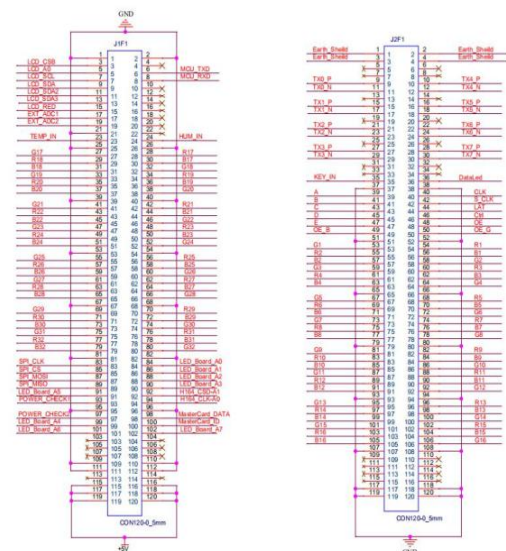

**Order Codes**

Product Code	Item
850-0002-01-0	SubitoNX L02

