

Front View



Rear View


Key Features

- 32 sets of RGB parallel data output, up to 512×512 pixels
- Support receiver configuration parameter dual backup and readback
- Data calibration, dual backup and restore
- Pre-store multi-receivers parameters
- Support image of different screens connection fastly
- Brightness and chroma calibration point by point
- Ethernet error code detection
- Monitor voltage and temperature
- FLASH(supported by intellectual module)

Specification

Performance	Load Capacity	512×512
	Data Set	Parallel 32 set Serial 64 sets, up to 96 sets
	Supported Standard	HDR10, HDR10+, HLG
Power	Input voltage	DC 3.6~5.5V/0.6A
	Max Power	3.0W
Environment	Temperature	-20°C~70°C
	Humidity	0%~65%
Physical	Weight	0.017kg
	Dimension	67.5mm×35.5mm×5.0mm

Dimension

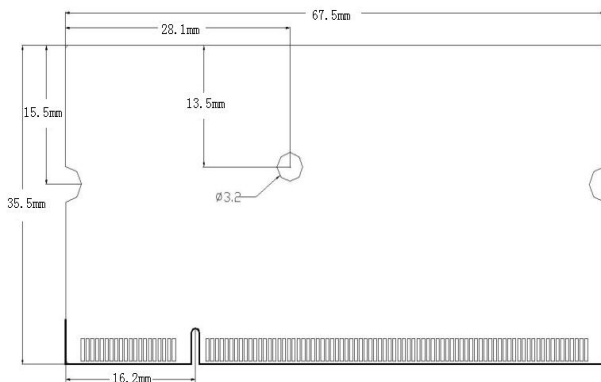

Order Codes

Product Code	Item
850-0004-01-0	SubitoNX L04

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

