


GX4L




Key Features

- Support layer movement, scale and capture
- USB one-click plug and play
- Support independent external audio
- Auto-zoom via one click
- Support custom output resolutions
- EDID
- Single LAN port supports width up to 3840,height up to 1920
- Dual ethernet cable backup
- Brightness calibration point by point
- Support one-click play,control software free

Application

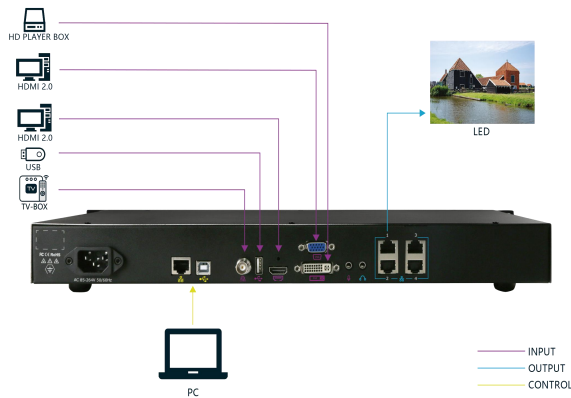

Dimension

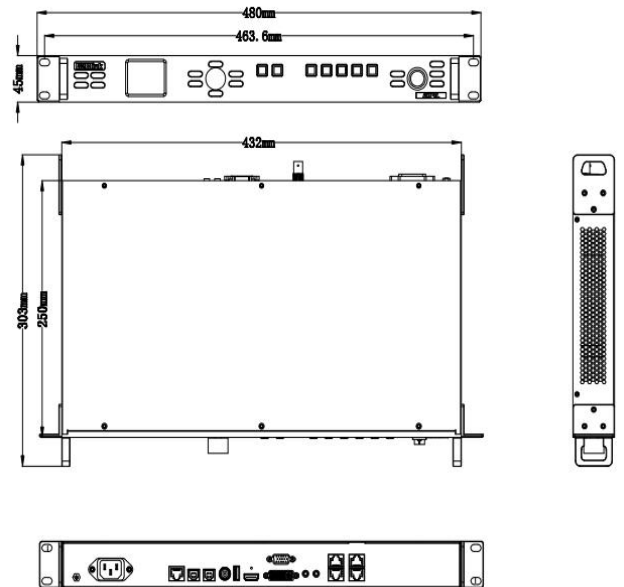

Order Codes

Product Code	Item
820-1004-03-0	GX4L

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]
 www.rgbink.com



Specifications

Connectors	Input	DVI	1×DVI-D	
		HDMI1.3	1×HDMI	
		VGA	1×DB15	
		USB	1×USB	
		CVBS	1×BNC	
	Output		4×RJ45	
	Audio	IN	1×RCA	
		OUT	1×RCA	
	Communication	RS232	1×RJ11	
		USB	1×USB-B	
	Power		1×IEC	
Performance	Input Resolutions	DVI HDMI		
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 2048×1152@60	
		VGA		
	VESA	800×600@60 1024×768@60 1280×1024@60 1366×768@60 1440×900@60 1600×1200@60 1920×1080@60 2048×1152@60		
Load Capacity	2310000 pixels			
H MAX Pixels	3840 pixels			
V MAX Pixels	1920 pixels			
	Supported Standard	VGA	UXGA	
		HDMI	1.3	
		CVBS	PAL/NTSC	
Power	Input Voltage	AC 100~240V, 50/60Hz		
	Max Power	25W		
Environment	Working Temperature	-20°C~70°C		
Physical	Weight	Net	2.62kg	
		Package	3.3kg	
	Dimension	Net	480mm×303mm×45mm	
		Package	540mm×360mm×135mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink[®]
 www.rgbink.com



Specifications are correct at time of printing and subject to change or alteration without notice.