

HDMI-DVI Cable




Key Features

- HDMI 2.0 compliant
- Support 4kx2k@60Hz transmission
- Up to 18Gpbs bitrate
- Multiple strands of 28AWG pure copper core
- 5-Layer anti-interference structure, shielding rate up to 85%
- Detachable protection caps with chain
- 50um plating connectors durable over 1000 repeated plug and unplug
- Stainless stainless screw lock
- Velcro strap for easy storage
- Synchronized audio and video lossless transmission
- Molded connectors with strain relief

Specification

Performance	Nominal Impedance	100±10Ω
	Nominal Capacitance	84±2pF/m
	Nominal Velocity of Propagation	2.38 x 105km/s
	DC Resistance	195 Ω/km
	Dielectric Strength	DC500V <1min
	Voltage Rating	30V
Standard	RoHS	Yes
Environment	Minimum Bend Radius	50mm
	Working Temperature	-20 °C ~80°C
Physical	Dimensions (Net)	Connector DVI 42.5mm×40mm×15.6mm
		HDMI 42mm×21mm×11.4mm
	Weight (Net)	2m 0.31kg 3m 0.41kg 5m 0.60kg

Dimension

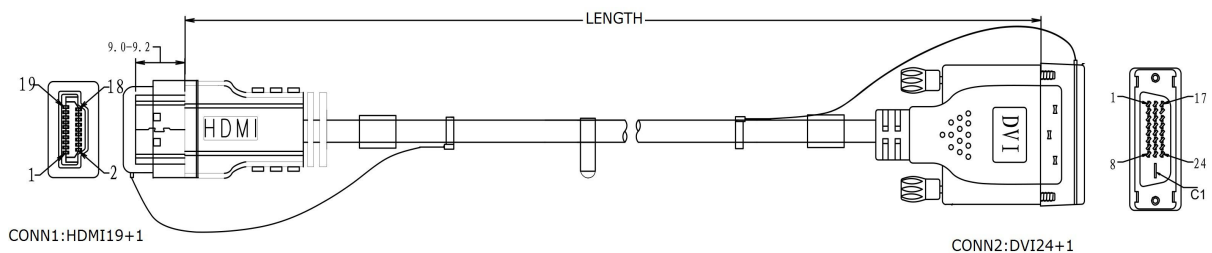

Order Codes

Product Code	Item
922-0001-50-0	HDMI-DVI Cable, with cap, 1.5m
922-0002-01-1	HDMI-DVI Cable, with cap, 2m
922-0003-01-0	HDMI-DVI Cable, with cap, 3m
922-0005-01-0	HDMI-DVI Cable, with cap, 5m

Wiring Diagram

