

# DVI-DVI Cable




## Key Features

- Support 3840×2160@30Hz transmission
- 2 × DVI-D male connector
- Multiple strands of 28AWG pure copper core
- 5-Layer anti- interference structure, shielding rate up to 85%
- Detachable protection caps with chain
- 50um plating connectors durable over 1000 repeated plug and unplug
- Stainless stainless screw lock
- Velcro strap for easy storage
- Molded connectors with strain relief

## Specification

<b>Performance</b>	Nominal Impedance	100±10Ω	
	Nominal Capacitance	84±2pF/m	
	Nominal Velocity of Propagation	2.38 x 105km/s	
	DC Resistance	195 Ω/km	
	Dielectric Strength	DC500V <1min	
	Voltage Rating	30V	
<b>Standard</b>	RoHS	Yes	
<b>Environment</b>	Minimum Bend Radius	50mm	
	Working Temperature	-20 °C ~80°C	
<b>Physical</b>	Dimensions (Net)	Connector 42.5×40×15.6mm	
	Weight (Net)	2m	0.41kg
		3m	0.59kg
	5m	0.93kg	

## Dimension

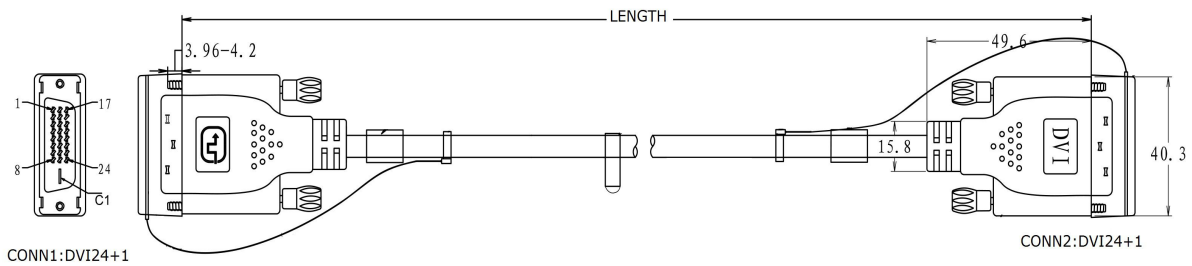

## Order Codes

Product Code	Item
921-0000-50-0	DVI-DVI Cable, with cap, 0.5m
921-0001-50-0	DVI-DVI Cable, with cap, 1.5m
921-0002-01-0	DVI-DVI Cable, with cap, 2m
921-0003-01-0	DVI-DVI Cable, with cap, 3m
921-0005-01-0	DVI-DVI Cable, with cap, 5m

## Wiring Diagram

