

MSP 331

HDMI to USB-C Capture



Key Features

- HDMI input/loop support up to 4K60 4:4:4, HDCP 2.2, backward compatible
- Bandwidth of USB-C is 3Gbps, USB 3.0 backward compatible with USB 2.0
- USB-C capture preview/record support up to 4K30, 1080P120Hz
- Support MIC in and line out
- Compatible with Windows7/8/8.1/10, MacOS, LinuxOS, plug and play
- support capture, record and stream on Android phone
- Support the third-party software compatible with UVC & UAC protocols, such as OBS/Zoom/Vmix , and live streaming platform software, etc.


Specification

Connectors	Input	HDMI 2.0	2×HDMI-A (1 In 1 Loop)	
	Capture/Power	Type-C	1×USB-C	
	Audio	Input	1×3.5mm Audio Jack	
		Output	1×3.5mm Audio Jack	
Performance	Input Resolution	HDMI	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/60 VESA 640×480@60/75 800×600@60/75 1024×768@60/75 1280×800@60 1280×1024@60/75 1360×768@60 1366×768@60 1400×900@60 1400×1050@60 1680×1050@60 2048×1152@60 3840×2160@30/60 4096×2160@60	
	Capture Resolution	USB-C		4K30Hz 1080P120Hz Note: When input resolution is 4K 50/60Hz, capture resolution only up to 1080P60
	Color Space	8 bit RGB/YCbCr 4:2:2/4:4:4/4:2:0; 10 bit RGB/YCbCr 4:2:2		
Power	Input Voltage	5V/1A		
	Max Power	2.5W		
Environment	Working Temperature	0°C ~ 70°C		
Physical	Net Weight	0.05kg		
	Packaged Weight	0.1kg		
	Net Dimension	80.5mm×80.5mm×23mm		
	Packaged Dimension	178mm×92mm×53mm		

Application



Dimension

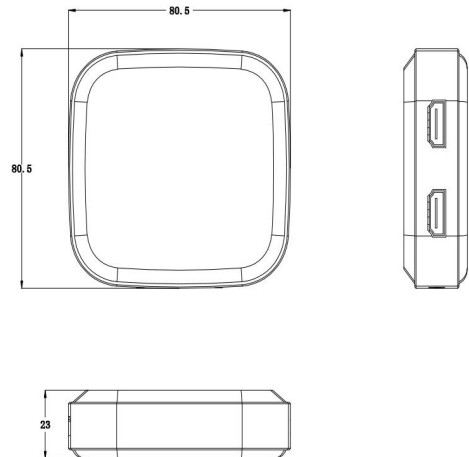

Order Code

Product Code Item	
601-0331-01-0	MSP 331

