



**Key Features**

- Load capacity up to 2.31m pixels
- Each LAN port supports width up to 3840,height up to 1920
- Support custom resolutions
- Prestore multi sets of receiver parameters
- Connect image of different screen via one click
- Support color space switch and improve image consistency
- Data calibration,dual backup and restoration
- File readback and backup
- Dual ethernet hot backup
- Ethernet error code detection
- Support for splicing freely


**Specification**

<b>Connectors</b>	Output	4×RJ45
<b>Performance</b>	Load Capacity	60Hz,2.31m pixels 3D-120Hz,1.3m pixels
	Supported Resolutions	1280×1024@60   1024×1200@60   1920×1200@60   2048×1152@60   3840×600@60
<b>Power</b>	Input Voltage	DC 3.6~12V/0.6A
	Max Power	3.0W
<b>Environment</b>	Temperature	-20℃~70℃
	Humidity	0%~65%
<b>Physical</b>	Weight	0.017kg
	Dimension	126.1mm×104.2mm×17.2mm

**Order Codes**

Product Code	Item
880-0033-01-0	SubitoNX Quatro

**Dimension**

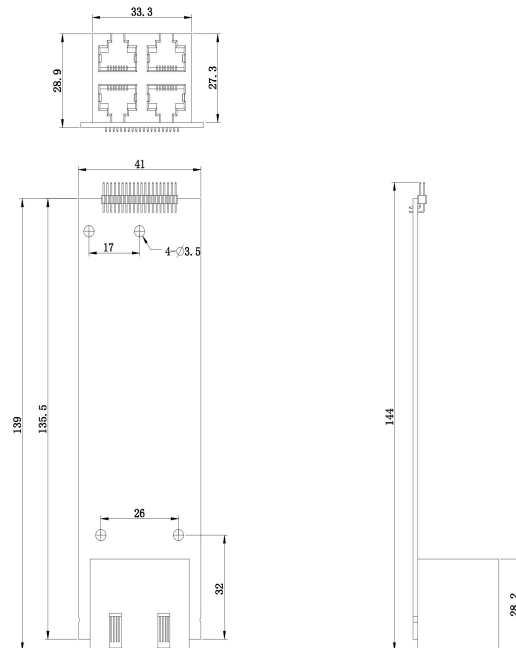

**Compatibility**

*This module can be used in the following products*

Product Code	Item
820-1001-11-0	X1-G
820-1004-02-0	GX4
710-1008-02-0	FLEXpro 8

