


CPX

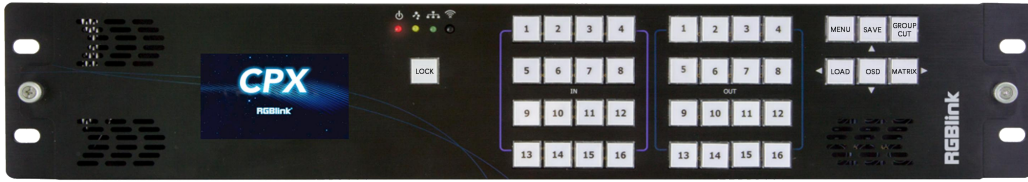


Key Features

- Matrix switching in any format for controlling devices
- Fast switching for signals or presets
- GROUP CUT function
- Load up to 256 presets
- One-key lock function
- XPOSE and CPX support to exchange data or communicate with each other
- Support simultaneous control of two FLEXpro16
- Dual-subtitle matrix


Specification

Connectors	Communication	RS232 1×DB9 LAN 1×RJ45
	Power	Power Supply 1×DC Jack
Power	Input Voltage	DC 12V
Operation	Temperature	-20 ~ 60℃
Environment	Humidity	0 ~ 65%
Physical	Packaged Dimension	484mm×83mm×88.6mm

Application

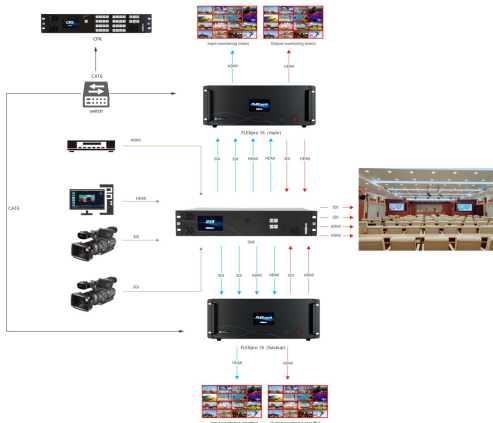

Dimensions

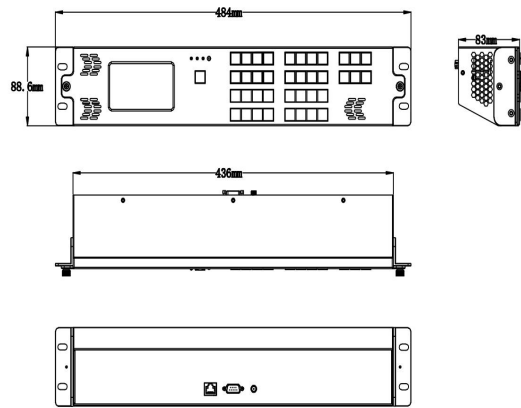

Order

Product Code	Item
250-0003-03-0	CPX

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

