




## mini-mx-1s-subito

### All-In-One Portable Case for mini-mx


This Dedicated Portable Case made of high-strength PP material is equipped with one 13.3-inch IPS display, one switcher and one LED control card. Integrated audio and video switching, PTZ camera control, multi-view monitoring, recording, LED management in one case, this portable and shock-resistant carry case is perfect for all sites, from music festival to lawn wedding, sports competition and other outdoor activities.

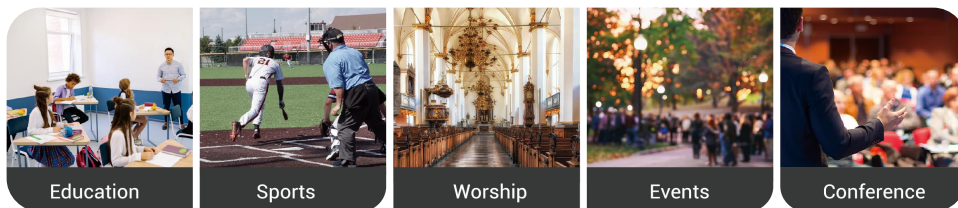

## Key Features

- Professional aviation connector to ensure high-quality performance
- Flexible standard connectors to meet personalized application
- Built-in 13.3" HD IPS monitor
- High strength PP flightcase features long-lasting durability
- hydraulic rod support to enhance the stability
- Powerful air-cooling system designed for outdoor use
- 4K multi-channel streaming video mixer
- Built-in 5.5 inch touch screen for menu operation
- Quad HDMI 2.0 inputs, resolutions up to 4K@60
- Dual HDMI 1.3 outputs for monitoring of multi-window PVM and PGM
- Dual MIC in, one Line-in, one Bluetooth in, dual audio out
- Mix for HDMI embedded and external audio
- One-key recording. Recording capacity of hard drive is up to 2T
- Support simultaneous streaming to 2 live streaming platforms via RTMP(S)
- Support multi-layer overlay, layer scaling and cropping
- 15 switching effect modes
- 5-direction joystick for controlling up to 4 PTZ cameras
- Save and store up to 16 scene presets. One-click for preset recall
- Support web control, compatible with mobile devices and computers, compatible with multiple operating systems
- Support Chroma Key
- One-key quick switch between portrait and landscape screen
- XPOSE control

## Application

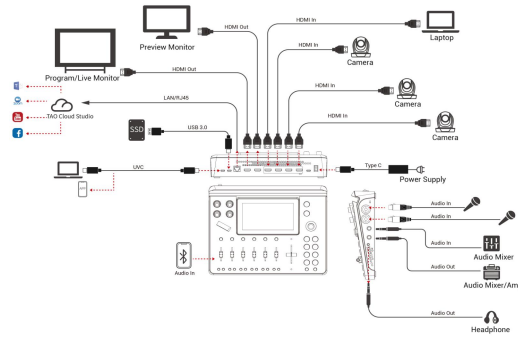

## Specification

<b>Connectors</b>	Input	HDMI 4K SDI UVC (webcam)	3xHDMI-A 1xBNC 1xUSB-C	
	Output	HDMI 2K SDI UVC USB (record) LAN (stream) LAN (subito)	1xHDMI-A 1xBNC 1xUSB-C 1xUSB-C 1xRJ45 4xRJ45	
	Audio In	MIC 1 MIC 2 LINE Bluetooth HDMI SDI	1xCANNON Jack (XLR) 1xCANNON Jack (XLR) 1x6.35mm TRS Jack 1xBluetooth Module 3xHDMI-A 1xBNC	
	Audio Out	AUDIO  HDMI SDI UVC LAN USB (record)	1x6.35mm TRS Jack 1x3.5mm mini-Jack 1xHDMI-A 1xBNC 1xUSB-C 1xRJ45 1xUSB-C	
	Control	USB (subito)	1xUSB-B	
	<b>Performance</b>	Input Resolution	HDMI  SDI	1280 × 720@50/59.94/60   1024 × 768@60   1280 × 768@60   1280 × 800@60   1280 × 1024@60   1360 × 768@60   1366 × 768@60   1440 × 900@60   1600 × 1200@60   1680 × 1050@60   1920 × 1200@60   1920 × 1080i@50/59.94/60   1920 × 1080p@23.98/24/25/29.97/30/50/59.94/60   3840 × 2160p@30/50/60   4096x2160@30/50/60   1080P@23.98/24/25/29.97/30/50/59.94/60
Output Resolution		HDMI  SDI USB (webcam)	1280 × 720@50/60   1024 × 768@60   1280 × 768@60   1280 × 1024@60   1360 × 768@60   1920 × 1080@23.98/24/25/29.97/30/50/59.94/60   1080P@23.98/24/25/29.97/30/50/59.94/60   1920 × 1080@24/25/30/50/60	
Video		Video Formats Grayscale Processing Video Sampling Video Latency	HDMI 2.0   HDCP 2.2 10bit 4:4:4 YUV <4 frames	
Audio		Line in Delay Audio Format	up to 8 frames HDMI Linear PCM, 24 bits/48 kHz, 2 ch USB Linear PCM, 16 bits/48 kHz, 2 ch	
Record/Storage		Record Formats Disk Formats	MP4 FAT32(≤32 GB)   exFAT(64GB~2T)	
Supported Standards		HDMI USB H.265	2.0 3.0 ITU-T H.265/ ISO/IEC 23008-2	
<b>13.3" Display</b>		Screen Size	13.3"	
		Panel Type	IPS	
		Display Color	16.7M, 72%NTSC/16.7M, 100% sRGB	
		Resolution	1920×1080 pixels	
	Aspect Ratio	1000:1		
	Gamut	72%		
	Brightness	350 cd/m <sup>2</sup>		
Refresh Rate	60Hz			
View Angle	85°/85°(L/R) 85°/85°(U/D)			
<b>Subito</b>	RJ45(each port)			
	Capacity	655,360 pixels		
	Horizontal Range	3840 pixels		
	Vertical Range	2048 pixels		
<b>Power</b>	Input Voltage	PD 12V/5A		
	Maximum Power	60W		
	Outer Size	460mm × 360 mm × 200mm		
<b>Physical</b>	Material	PP		
	Color	Black		
	Packaged Weight	9.23 kg		
	Packaged Dimension	470mm × 370mm × 210mm		

## Order Codes

Order Codes	Item
230-0004-06-0	mini-mx-1s-subito (1 × mini-mx + 1 × Flightcase Suite + 1 × 13.3" Display + 1 × subito Sending Card)

## Contact us

Tel: +86-592-5771197  
 Fax: +86-592-5788216  
 E-mail: sales@rgblink.com  
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3,  
 Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

