




mini-mx-subito

All-In-One Portable Case for mini-mx

This Dedicated Portable Case made of high-strength PP material is equipped with one 13.3-inch IPS display, one switcher and one LED control card. Integrated audio and video switching, PTZ camera control, multi-view monitoring, recording, LED management in one case, this portable and shock-resistant carry case is perfect for all sites, from music festival to lawn wedding, sports competition and other outdoor activities.

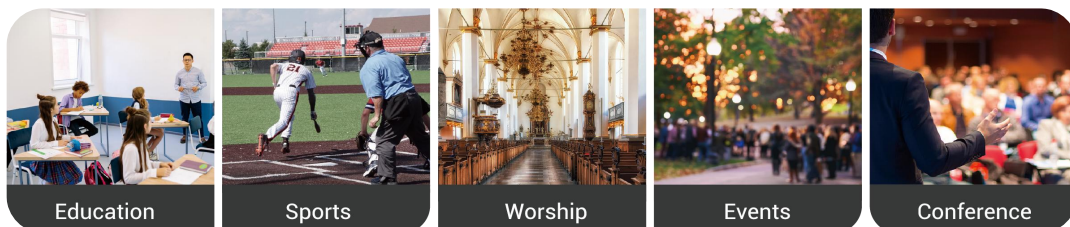

Education

Sports

Worship


Events

Conference

Key Features

- Professional aviation connector to ensure high-quality performance
- Flexible standard connectors to meet personalized application
- Built-in 13.3" HD IPS monitor
- High strength PP flightcase features long-lasting durability
- hydraulic rod support to enhance the stability
- Powerful air-cooling system designed for outdoor use
- 4K multi-channel streaming video mixer
- Built-in 5.5 inch touch screen for menu operation
- Quad HDMI 2.0 inputs, resolutions up to 4K@60
- Dual HDMI 1.3 outputs for monitoring of multi-window PVW and PGM
- Dual MIC in, one Line-in, one Bluetooth in, dual audio out
- Mix for HDMI embedded and external audio
- One-key recording. Recording capacity of hard drive is up to 2T
- Support simultaneous streaming to 2 live streaming platforms via RTMP(S)
- Support multi-layer overlay, layer scaling and cropping
- 15 switching effect modes
- 5-direction joystick for controlling up to 4 PTZ cameras
- Save and store up to 16 scene presets. One-click for preset recall
- Support web control, compatible with mobile devices and computers, compatible with multiple operating systems
- Support Chroma Key
- One-key quick switch between portrait and landscape screen
- XPOSE control

Application

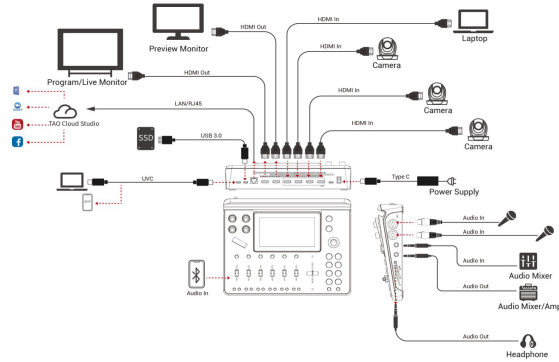

Specification

Connectors	Input	HDMI 4K UVC (webcam)	4×HDMI-A 1×USB-C
	Output	HDMI 2K UVC USB (record) LAN (stream) LAN (subito)	1×HDMI-A 1×USB-C 1×USB-C 1×RJ45 4×RJ45
	Audio In	MIC 1 MIC 2 LINE Bluetooth HDMI	1×CANNON Jack (XLR) 1×CANNON Jack (XLR) 1×6.35mm TRS Jack 1×Bluetooth Module 4×HDMI-A
	Audio Out	AUDIO HDMI UVC LAN USB (record)	1×6.35mm TRS Jack 1×3.5mm mini-Jack 1×HDMI-A 1×USB-C 1×RJ45 1×USB-C
	Control	USB (subito)	1×USB-B
Performance	Input Resolution	HDMI	1280 × 720@50/59.94/60 1024 × 768@60 1280 × 768@60 1280 × 800@60 1280 × 1024@60 1360 × 768@60 1366 × 768@60 1440 × 900@60 1600 × 1200@60 1680 × 1050@60 1920 × 1200@60 1920 × 1080i@50/59.94/60 1920 × 1080p@23.98/24/25/29.97/30/50/59.94/60 3840 × 2160p@30/50/60 4096x2160@30/50/60
	Output Resolution	HDMI	1280 × 720@50/60 1024 × 768@60 1280 × 768@60 1280 × 1024@60 1360 × 768@60 1920 × 1080@23.98/24/25/29.97/30/50/59.94/60
	Video	Video Formats	HDMI 2.0 HDCP 2.2
		Grayscale Processing	10bit
		Video Sampling	4:4:4 YUV
	Audio	Video Latency	<4 frames
		Line In Delay	up to 8 frames
Record/Storage	Audio Format	HDMI USB	Linear PCM, 24 bits/48 kHz, 2 ch Linear PCM, 16 bits/48 kHz, 2 ch
	Record Formats	MP4	
Supported Standards	Disk Formats	FAT32(≤32 GB) exFAT(64GB~2T)	
	HDMI	2.0	
	USB	3.0	
13.3" Display	H.265	ITU-T H.265/ ISO/IEC 23008-2	
	Screen Size	13.3"	
	Panel Type	IPS	
	Display Color	16.7M, 72%NTSC/16.7M, 100% sRGB	
	Resolution	1920×1080 pixels	
	Aspect Ratio	1000:1	
	Gamut	72%	
	Brightness	350 cd/m ²	
Refresh Rate	60Hz		
View Angle	85°/85°(L/R) 85°/85°(U/D)		
Subito	RJ45(each port)		
	Capacity	655,360 pixels	
	Horizontal Range	3840 pixels	
	Vertical Range	2048 pixels	
Power	Input Voltage	PD 12V/5A	
	Maximum Power	60W	
Physical	Outer Size	460mm × 360 mm × 200mm	
	Material	PP	
	Color	Black	
	Packaged Weight	9.23 kg	
	Packaged Dimension	470mm × 370mm × 210mm	

Order Codes

Order Codes	Item
230-0004-04-0	mini-mx-subito (1 × mini-mx + 1 × Flightcase + + 1 × 13.3" Display + 1 × subito Sending Card)

Contact us

Tel: +86-592-5771197
 Fax: +86-592-5788216
 E-mail: sales@rghlink.com
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3,
 Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

